



BriskHeat®

Freeze Protection - Industrial Guide

SAFEGUARDING INDUSTRIAL APPLICATIONS IN COLD WEATHER

Pipe Heat Tracing ■ Emergency De-Icing & Temporary PVC Pipe Warming
Tank & Vessel Heating ■ Roof & Gutter Ice Dam Prevention
Commercial Pipes ■ Protecting Mechanical Devices

TABLE OF CONTENTS

INTRODUCTION

<i>Your Guide to Safeguarding Applications Industries That Benefit From Freeze Protection</i>	03
---	----

THE FREEZE PROTECTION BASICS

<i>Understanding The Threat of Freezing</i>	04
<i>Why Keep Equipment Warm?</i>	05

ENERGY EFFICIENCY

<i>The Four Keys to Energy Efficient Heating</i>	06
<i>Energy Efficient Heating Tips</i>	06
<i>Reducing Energy Costs Tips</i>	06

APPLICATIONS

<i>Common Applications</i>	07
----------------------------	----

RECOMMENDED SOLUTIONS

<i>Pipes & Valves</i>	08
<i>Large Tanks, Vessels, & Hoppers</i>	09
<i>Roof & Gutter De-icing</i>	10-11
<i>Containers</i>	12-13
<i>Emergency De-Icing/Backup Heaters</i>	14
<i>Temperature Control</i>	15
<i>Snow & Ice Sensors</i>	16
<i>Additional Protection</i>	17

CHECKLISTS FOR WINTERIZING YOUR FACILITY

<i>General</i>	18-19
<i>Testing & Inspection Log for Heating Cable</i>	20
<i>Heating Cable Insulation Resistance Check</i>	21
<i>Pipe Lines & Valves Exposed Checklist</i>	22
<i>Heating & Freeze Protection for Large Tanks Checklist</i>	23
<i>Procurement Lists</i>	24-27

BriskHeat

YOUR GUIDE TO SAFEGUARDING APPLICATIONS IN COLD WEATHER

Unpredictable weather is becoming the new norm, and that means you need a solid plan to protect your critical equipment, materials, and infrastructure from the costly damage freezing temperatures can cause.

Globally, industries are facing significant financial hits due to freeze damage. This guide will help you understand, anticipate, and prevent these issues, so you can keep things running smoothly and safely all winter long.

GET READY BEFORE THE COLD HITS

Think of effective freeze protection as more than just a winter chore; it's a vital part of keeping your operations resilient and your assets lasting longer. When you understand how freezing impacts your process, explore your heating options, and have a proactive maintenance plan in place, you'll protect your facility, equipment, and materials from the harsh effects of cold weather.

At BriskHeat, we're here to be your go-to partner for innovative and reliable heating and temperature control solutions. With over 75 years in the business, we offer a complete lineup of products—from heating tapes and cables to drum and tote heaters—designed to meet the unique needs of various industries. Plus, our expert application and engineering teams are ready to help you design the most efficient and effective freeze protection system for whatever you need.



FOR OUR FULL LINE OF FREEZE PROTECTION SOLUTIONS, SCAN THE QR CODE

INDUSTRIES BENEFITING FROM FREEZE PROTECTION:

- Oil & Gas
- Water Treatment
- Transportation
- Agriculture
- Construction
- Mining
- Chemical Processing
- Food Processing
- Biotech
- Aviation
- Laboratory
- Power Generation
- Pharmaceutical
- Marine/Shipping
- HVAC & Refrigeration
- Warehousing & Logistics
- General Manufacturing

UNDERSTANDING THE THREAT OF FREEZING TEMPERATURES

Freeze protection is the practice of preventing materials, fluids, and equipment from reaching temperatures at which they begin to freeze, crystallize, or become excessively viscous. The term “freeze protection” can also be used to prevent undesirable physical changes to materials when the ambient temperature decreases. Different materials react uniquely to cold, demanding varied protection strategies. Those strategies may change based on application.

WHAT FREEZES?

COMMON SUBSTANCES AND THEIR COLD WEATHER BEHAVIOR

Water-Based Products: These are the most straightforward, beginning to crystallize and freeze at 32°F (0°C). The freezing point can be modified by mixing other additives such as salt, sugar, alcohol, or ethylene glycol (anti-freeze). Crystallized water is more resistant to flow and can cause jams in everything from waterlines on exterior walls to outdoor water lines leading to ancillary buildings. Water lines used in fire suppression systems may be particularly vulnerable. Frozen water can cause pipes to burst and damage equipment. But “water-based” products are not just water. Wastewater lines need to be buried below frost lines or heated.

Oil-Based Products: Unlike water, fuel oils and lubricants tend to gel or thicken into a waxy consistency before they freeze solid. This process can begin above 32°F (0°C) and continuously thicken the colder it gets. For

instance, Diesel fuel can begin to gel around -6°F (-21°C), while motor oils and hydraulic fluids Experience significant viscosity increases at temperatures well above their freezing points, impacting machinery performance. Motor oil is particularly sensitive to cold temperatures with some manufacturers recommending a lower viscosity 5W-30 or full synthetic to ensure the best performance.

Chemical and Other Liquids: Many chemicals, gases, and specialized fluids have unique freezing points that will affect performance. For example, Diesel Exhaust Fluid (DEF) freezes at 12.2°F (-11°C). Cutting fluids, paints, solvents, resins, pastes, and other liquids have specific storage temperatures. Below these limits the properties of the materials will change and it may not be suitable for their intended use.

WHY KEEP EQUIPMENT WARM?

Even if fluids within equipment don’t freeze solid, low temperatures can cause a variety of problems within your operation.

Increased Viscosity: Oils, lubricants, and hydraulic fluids become thicker, leading to increased resistance, higher power consumption, and slower operations for pumps, motors, and machinery. Also consider the optimum temperatures required for the materials being processed. For instance, in cosmetic manufacturing, the temperature of components such as wax, glycerin and emulsifiers mix differently based on their viscosity. The viscosity of fuel oils impacts atomization, allowing better mixing of oil and steam. And, as we know, viscosity changes with temperature.

Condensation: Often overlooked are the impact cold temperatures can have on gases. Some processes such as semiconductor manufacturing require heated gases as part of the production process. Processes requiring steam require heated pipelines to maintain temperature and prevent condensation. Fuel gases can condense in cold weather as well. Not only does this change how the fuel will burn but can cause rust in pipelines and components. Temperature fluctuations can cause condensation inside

control panels and electronic enclosures, leading to short circuits, corrosion, and malfunction.

Component Brittleness: Metals, rubbers and plastics can become brittle in extreme cold, making them more susceptible to cracking or breaking under stress. Freezing temperatures can be especially hazardous to outdoor equipment including door seals.

Battery Performance: Cold temperatures significantly reduce battery capacity and charging efficiency. Outdoor equipment may not start. The performance of electric vehicles is greatly impacted, not only taking longer to charge, but decreasing the travel distance per charge.

Sensor and Instrument Inaccuracy: Precision instruments, gauges, and sensors can provide inaccurate readings or fail entirely when operating outside their optimal temperature range. Be sure instrumentation compensates for changes in temperature and pressure.

By maintaining a consistent, warmer temperature, you can avoid these issues, ensuring your equipment operates as designed, even in the harshest winter conditions.

COMMON EQUIPMENT REQUIRING FREEZE PROTECTION

Control Panels & Electronic Enclosures

Prevent condensation, maintain optimal operating temperatures for sensitive electronics, and protect against short circuiting and corrosion.

Pumps, Motors, & Compressors

Prevent lubricants and fluids from gelling, ensure easy startup, and reduce wear on components.

Conveyors & Material Handling Equipment

Prevent lubricants from thickening in bearings and gearboxes, ensuring smooth operation and preventing motor overload.

Hydraulic & Pneumatic Systems

Maintain fluid viscosity for proper pressure flow, and prevent lines from freezing.

BRISKHEAT APPLICATION BOOK

BriskHeat's Distributors, Inside Sales Team, and Application Engineers receive inquiries year-round from customers asking for solutions based on our experience. Scan the QR code below to view BriskHeat's extensive application book online!



General Freeze Protection

- Emergency De-Icing
- Power Plant Freeze Protection for Outdoors
- Residential & Commercial Pipe Freeze Protection
- Roof & Gutter Ice Dam Prevention

Hazardous Areas

- Class I Division Industrial Environments Freeze Protection
- Tanks and Vessels Freeze Protection in Hazardous Areas

Chemical Processing

- Drum and Pail Viscosity Control
- Gas Cylinder Handling IBC/Tote Tank Warming
- Tanks and Vessels Freeze Protection

THE FOUR KEYS TO ENERGY EFFICIENT HEATING

Fall is the best time to examine your process heating systems for energy efficiency. Making improvements before the cold months is much easier and efficient. Heating is a critical factor in manufacturing and can contribute to the overall cost of operation. Insulation is an important consideration in minimizing heat loss and decreasing heating cost. Insufficient insulation can jeopardize worker safety as well as product quality. It can also increase emissions of greenhouse gases and damage temperaturesensitive equipment.

One: Knowledge of your system requirements. Where does your system require heating or cooling for a process or product? What is the target temperature and what is the acceptable variation? What

is the criticality of maintaining the acceptable range? Use this information to determine the correct heater, temperature controller and insulation.

Two: Examining potential sources of heat loss. The two most common causes of heat loss are conduction and convection. Conduction is the physical transfer of heat from a hot mass to one that is cooler. An example is heated gas in a pipe, which can lose heat to a pipe stand. Convection heat loss happens through air. When an oven has a gap in the wall allowing heat to escape, this is an example of convection heat loss.

Three: Selection of insulating material. Insulation is rated by a physical property of thermal

conductivity. The lower the number, the lower the heat loss. Be sure the material is appropriate for the exposure temperature and environment where it will be used. If moisture is present, use materials that will not be damaged by exposure.

Four: Proper installation techniques. Heat transfer is optimized by the heater being in direct contact with the surface to be heated. Pressure sensitive adhesives, high-temperature adhesive tape, RTV or heat conductive putty focus energy where it's needed. Proper installation of insulation is also important. Avoid gaps to reduce heat loss. Fiber materials should be covered to reduce airborne particles. Use more durable materials where there is risk of damage.

TIPS FOR ENERGY EFFICIENT HEATING

1. Use a pyrometer to scan production areas. Address areas that are excessively hot or cold compared to ambient needs, as they indicate inefficiency.
2. Improve heating and cooling efficiency by using appropriate insulation.
3. If insulation feels very warm, it's likely insufficient; increase thickness as needed.
4. Utilize recuperators or heat exchangers to repurpose waste heat from one process to another.
5. Use ambient temperature controllers or Thermo-Cubes with heat trace systems to minimize energy consumption.

TIPS FOR REDUCING ENERGY COSTS

1. Establish a specific temperature range to be maintained. For freeze protection, heat below 37°F (3°C), but avoid heating above 45°F (7°C). Temperatures may vary based on safety margins or materials.
2. Maintain office and production areas at lower temperatures in winter. Unoccupied areas generally don't require heating above 60°F (15°C).
3. Ensure windows are sealed to prevent air leaks, and consider applying film to buffer cold air.
4. Only heat or cool storage areas if extreme temperatures pose a risk of material damage or facility damage (e.g., burst pipes).


COMMON FREEZE PROTECTION APPLICATIONS



HEAT TRACE FOR PIPES

Whether you're in need of a hard-wired heat trace system for your pipe set-up or a plug-and-play solution that is ready to install, BriskHeat provides selfregulating heat trace for a variety of environments, including ordinary, hazardous, and wet-area locations.

Essential for safeguarding critical pipelines and process lines from freezing, BriskHeat's heat trace solutions deliver consistent warmth directly to the pipe. Whether preventing freeze-ups in water lines or maintaining viscosity in chemical processes, heat trace ensures uninterrupted flow and prevents costly damage in exposed environments.

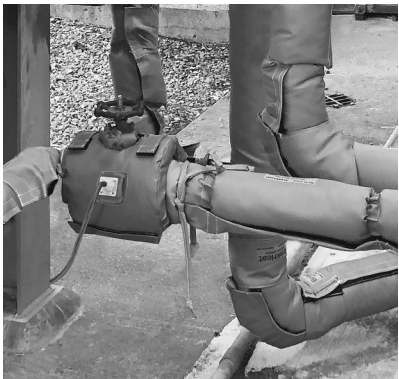

VALVE, GAUGE, & CONDUIT PROTECTION

Valves and instrumentation are particularly vulnerable to cold. BriskHeat offers comprehensive protection through heating tapes, specialized insulation and heated jackets, ensuring optimal performance. Solutions range from our easy-to-install INSUL-LOCK Pipe Insulation to our preengineered Wintershield and customdesigned heated jackets, all tailored to prevent freezing and maintain critical components.



LARGE TANK/VESSEL HEATING SYSTEMS

For large-scale industrial containers like hoppers, tanks, and vessels, maintaining precise temperatures is vital for material flow and integrity. BriskHeat's robust silicone heating blankets are ideal for these applications, providing uniform, efficient heat across vast surfaces to prevent freezing, control viscosity, and ensure smooth material discharge.



ROOF & GUTTER HEAT TRACE

Protect your building's structural integrity from the damaging effects of winter with BriskHeat's roof and gutter heat trace systems. These selfregulating cables efficiently melt snow and ice from eaves, gutters, and downspouts, preventing destructive ice dams and ensuring proper drainage to safeguard your roof, gutters, and foundation.

RECOMMENDED SOLUTIONS FOR PIPE LINES & VALVES

Pipe lines and valves are particularly vulnerable to freezing, which can lead to costly damage and operational downtime. Identifying critical areas and applying the right heating solutions is essential.



SELF-REGULATING HEAT TRACE

Self-regulating cable or heat trace is well suited to cold weather conditions as it automatically adjusts heat output based on surface temperature. It is also safe to overlap and can be cut-to-length and terminated in the field. Cable is available in different wattages depending on the severity of the temperatures and heating requirements of the application. SLCBL is available in 3, 5, 8, 10, and 12 watts/foot. There are three types of outer jackets used for different applications.

- “B” has a tinned braided outer jacket that is best suited for dry environments.
- “BP” has a thermoplastic elastomer over jacket required for wet areas.
- “BF” has a fluoropolymer over jacket which is required for areas where caustic chemicals are present.

STANDARD SPOOL LENGTHS: 50 ft, 125 ft, 150 ft, 250 ft, 500 ft, 1000 ft (15 m, 38 m, 46 m, 76 m, 152 m). For orders greater than 10,000 ft (3,048 m), call for pricing.

OUTER JACKET	PART NO. 120 VAC	WATTS/FT (WATTS/M)
TINNED COPPER BRAID	SLCBL3120B	3 (10)
	SLCBL5120B	5 (16)
	SLCBL8120B	8 (26)
	SLCBL10120B	10 (33)
	SLCBL12120B	12 (40)
THERMOPLASTIC ELASTOMER	SLCBL3120BP	3 (10)
	SLCBL5120BP	5 (16)
	SLCBL8120BP	8 (26)
	SLCBL10120BP	10 (33)
	SLCBL12120BP	12 (40)
FLUOROPOLYMER	SLCBL3120BF	3 (10)
	SLCBL5120BF	5 (16)
	SLCBL8120BF	8 (26)
	SLCBL10120BF	10 (33)
	SLCBL12120BF	12 (40)

TIP: ORDERS OVER 100 FEET ELIMINATE CUTTING FEES.

RECOMMENDED SOLUTIONS FOR LARGE TANKS, VESSELS, & HOPPERS

For large-scale storage and processing, freezing or increased viscosity within tanks, vessels, and hoppers can lead to severe operational disruptions and significant financial loss. Protecting these crucial assets prevents product solidification, ensures consistent material flow, avoids costly downtime, and safeguards the integrity of the containers. All are vital for maintaining continuous production and efficiency in cold climates.



SILICONE HEATING BLANKETS

BriskHeat’s versatile heating blankets provide efficient, uniform heating for these large surfaces, offering robust freeze protection and process temperature maintenance without requiring extensive hard wiring.

These blankets offer moisture, chemical, and radiation resistant solutions, with industrial strength pressure-sensitive adhesive backing options.

RECOMMENDED OPTIONS:

- SRL/SRP/SRW Series: Silicone rubber heating blankets made for metal or plastic surfaces
- SRL/SRP/SRM/ADJ-Series: Silicone rubber heating blankets with built-in temperature control for plug-and-play operation.



INSUL-EZ

Insul-EZ is an adhesive backed foam sheet of insulation which helps to ensure optimum thermal efficiency while protecting your heater. Ideal for insulating tanks, vessels, cabinets, enclosures, hoppers, silos, conveyors, and vats to reduce heat loss. Moisture, mold, and mildew-resistant antimicrobial foam. Maximum temperature 220°F (104°C).

RECOMMENDED OPTION:

- INSULEZ48: 0.75 inches thick, 48 in x 48 in (122 cm x 122 cm) sheet peel and stick insulation.



CUSTOM SILICONE BLANKETS

In need of a custom-designed silicone blanket?

- BriskHeat can work with you and your team to manufacture silicone rubber heating blankets of any shape and size to fit your heating needs.

RECOMMENDED SOLUTIONS FOR ROOF & GUTTER DE-ICING



PIPE INSULATION

Essential for enhancing the efficiency of heating cables and preventing heat loss, pipe insulation creates a thermal barrier around pipes. This reduces energy consumption by trapping heat, ensuring your heating solutions work optimally to prevent freezing.

RECOMMENDED OPTIONS:

- INSUL-LOCK: environmentally-friendly, CFC-free, flexible elastomeric thermal insulation. The double seal reduces air infiltration and is non-porous, fiber-free and resistant to mold growth. Can be used with both heating cables and tapes.
- Custom Cloth Insulators: a durable and reusable solution with its easy hook & loop fasteners. Can be used with both heating cables and tapes.



HEAT TRACE ACCESSORIES

Connection, termination, and end seal kits are crucial for the safe and proper installation of heat trace systems, these accessories ensure system integrity. BriskHeat connection and termination kits provide secure electrical connections and seals, while specialized tapes firmly attach heating cables to pipes for consistent heat transfer.

RECOMMENDED OPTIONS:

- PTBS-GET: Power Connection Kit with Multiple Entries
- JHE-GET: Low Profile End Seal Kit
- JHS-GET: Low Profile Splice Connection Kit
- JHT-GET: Low Profile Tee Connection Kit
- JHE-LG/LR-GET: LED Monitor Light with End Seal Kit
- AAT260: Aluminum Tape 2 in x 180 ft (51 mm x 55 m)



WINTERSHIELD™

BriskHeat’s Wintershield provided a pocket of warmth to protect devices like pipes, valves, pumps, and instrumentation against extreme cold. With lace-up openings on three sides, this shield is easy to install.

RECOMMENDED OPTION:

- WSP-Series: Wintershield can be made in 120V or 240V in either a standard or large size. Available in custom shapes and sizes.

RECOMMENDED SOLUTIONS FOR ROOF & GUTTER DE-ICING



SPEEDTRACE ROOF & GUTTER KITS

BriskHeat’s SpeedTrace Roof & Gutter De-Icing Kits are designed to prevent the formation of ice dams and icicles on rooftops by using an electric self-regulating heating cable system. The heating cable melts away excessive ice and snow from the roof, gutters, and downspouts to ensure proper draining.

KIT INCLUDES:


- SpeedTrace Roof & Gutter Heating Cable (pre-assembled with power plug)
- Heavy-Duty Roof Clips
- Downspout Hanger Brackets
- UV Resistant Cable Ties

PART NO. 110-120VAC	PART NO. 208-277VAC	CABLE LENGTH FT (M)	ROOF CLIPS	DOWNSPOUT HANGERS	CABLE TIES	CAUTION LABELS
FFRG15-50	FFRG25-50	50 (15.2)	30	2	15	2
FFRG15-75	FFRG25-75	75 (22.8)	50	4	20	2
FFRG15-75	FFRG25-75	100 (30.4)	60	4	25	2
FFRG15-75	FFRG25-75	125 (38.1)	80	4	30	2
FFRG15-75	FFRG25-75	150 (45.7)	100	6	40	2

MEASURING HEATING CABLE LENGTH FOR ROOF & GUTTER DE-ICING

Use the equation below to calculate heating cable length: Cable Required for Roof = (RxM) + G + D (R) roof edge linear length, (M) multiplier from table below, (G) gutter length, (D) downspout length (x2 if heating cable returns back to gutter)

ROOF OVERHANG (EAVE/SOFFIT)	STANDARD ROOF	STANDING SEAM ROOF, 18 IN (45 CM) SEAM	STANDING SEAM ROOF, 24 IN (60 CM) SEAM
None	2.0	2.5	2.0
12 in (30 cm)	2.5	2.8	2.4
24 in (60 cm)	3.0	3.6	2.9
36 in (90 cm)	4.0	4.3	3.6

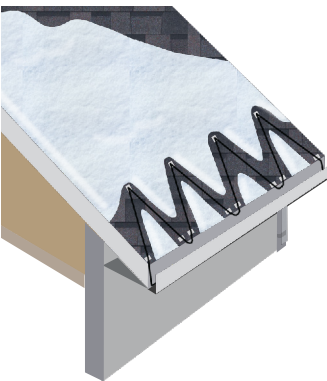

RECOMMENDED SOLUTIONS FOR CONTAINERS

Containers such as drums, pails, tote tank/IBCs, and gas cylinders contain materials that either freeze or need a specific flow rate to maximize production. Utilizing a portable plug-and-play electrical surface heater on the container prior to and during production is a cost-effective and simple way to thaw and improve the flow rate of the material within the container.

IBC/TOTE TANK HEATERS

Specifically designed for Intermediate Bulk Containers (IBCs) or tote tanks, these large, durable heaters wrap around the entire container to provide uniform heating. They are crucial for preventing freezing, maintaining viscosity, and ensuring the easy flow of temperature-sensitive materials stored in IBCs, streamlining handling and production processes.

RECOMMENDED OPTIONS:

- TOTE-Series: Fully insulated blanket heater wraps around the tote tank without contaminating or scorching your product. Adjustable straps allow it to fit multiple container widths. Includes dual adjustable thermostat control: 50°F to 160°F (10°C to 71°C).
- TOTEW/TOTEWI-Series: Water-resistant, IP54 rated, full-coverage IBC/ Tote Tank heaters and insulators suitable for use in outdoor/indoor and washdown environments. Includes digital controller.
- WEX-Series: ATEX-rated wraparound tote tank heaters for hazardous locations.
- TTH-Series: Silicone Rubber IBC/Tote Tank heater that installs underneath the plastic bladder for direct surface contact. For added efficiency pair this with our wraparound insulators.

GAS CYLINDER HEATERS

Designed specifically for gas cylinders such as propane, nitrogen, or other industrial gases, these heaters ensure consistent gas pressure and flow by maintaining optimal temperatures. They are essential in cold environments to prevent pressure drops due to slow vaporization, ensuring a continuous and efficient supply of gas for various applications.

RECOMMENDED OPTIONS:

- GCW Series: For ordinary locations, these heaters provide a 2 inch (50mm) thick insulation and self-regulating heating element. No extra temperature control necessary. 120V model includes standard 3-prong (NEMA 5-15) grounded plug.
- HCW-Series: For Class I, Division I Hazardous Areas.
- WEX-Series: For ATEX Hazardous-area locations.



RECOMMENDED SOLUTIONS FOR CONTAINERS

SILICONE DRUM AND PAIL HEATERS

Silicone Band Drum Heaters are highly flexible heaters designed as individual bands that wrap directly around the circumference of a drum or pail. They provide concentrated, direct heat to the container wall, making them ideal for spot heating or when multiple bands are needed to achieve specific heating zones for viscosity control and freeze protection.

RECOMMENDED OPTIONS:

- Econo-Series: Great all-purpose choice that is economical, moisture & chemical resistant and long lasting.
- DHCS/DHCH/DPCS/DPCH Series: Heavy-Duty and Extra-Heavy-Duty Silicone Rubber Band Heaters for extra strength and durability.

Both options include built-in adjustable thermostat control. BriskHeat's 120V models include standard 3-prong (NEMA 5-15) grounded plugs.

FULL COVERAGE DRUM HEATERS

Full coverage drum heaters offer superior heat efficiency and uniformity, these insulated cloth heaters fully envelop the drum. Their complete coverage and integrated insulation provide faster heat-up times and maintain consistent temperatures across the entire container, making them ideal for sensitive materials, energy savings, and comprehensive freeze protection.

BriskHeat provides full coverage drum heating options for ordinary, wet, and hazardous locations.

RECOMMENDED OPTIONS:

- FGDH/FGPDH/FGDI-Series: Fully insulated and provide more wattage for faster and more energy-efficient heat-ups. Heaters include built-in digital temperature controllers. 120V models include standard 3-prong (NEMA 5-15) grounded plugs.
- WEX-Series: ATEX-rated full-coverage drum heaters for hazardous locations.

DHI/TTI CONTAINER IMMERSION HEATERS

BriskHeat **DHI** Drum Immersion Heater & **TTI** Tote Tank/IBC Immersion Heater are easy-to-install and deliver **1,000 watts (DHI)** and **1,500 watts (TTI)** for maximum heat to your containers. With a built-in digital controller for easy programming and a 10 ft (3 m) cord and plug, this immersion heater provides simple plug-and-play operation. The Incoloy 840 heater will not corrode or contaminate your products, is grounded, and includes a 180°F (82°C) high-limit cut-off for safety and peace of mind.



RECOMMENDED SOLUTIONS FOR EMERGENCY DE-ICING/BACKUP HEATERS

Having versatile, multi-purpose heaters readily available is crucial for quick response during unexpected freeze events or emergency de-icing. Flexible heating tapes are invaluable for rapidly thawing frozen pipes and valves, while enclosure heaters are essential for protecting sensitive electronics and controls from condensation and extreme cold, ensuring critical systems remain operational throughout the winter.



XtremeFLEX® HEATING TAPES WITH ADJUSTABLE THERMOSTAT

It is always a good idea to have a few flexible multi-purpose heaters on hand in the event of an emergency de-icing. XtremeFlex heating tapes with built-in adjustable temperature controls are ideal to prevent freezing or to thaw frozen valves, pipes, and many other objects.

Unlike blow torches or heat guns, these heaters are safe, make direct contact with the object to be heated, and are moisture and chemical resistant. With proper installation of the thermostat, these tapes can be ran unsupervised. These tapes are available in 120V or 240V, in a variety of lengths and widths.

TIPS:

- Have at least one of each size on hand so that you have the correct size when you need it! Shorter lengths are typically used for valves, bearings, pumps, and actuators. Longer lengths are typically used for pipe runs.
- When estimating heating tape lengths, keep in mind that the heating tape cannot be overlapped upon itself as this will cause damage to the heater.

RECOMMENDED OPTIONS:

- MSTAT-Series: Up to 160°F (71°C)
- HSTAT-Series: Up to 425°F (218°C)

ENCLOSURE HEATERS

BriskHeat Silicone Rubber Enclosure Heaters (TSREH) prevent condensation or freezing of electronics inside enclosures and panels. Available in a variety of configuration options, built with or without built-in thermostat controls. Moisture, chemical, and radiation resistant.

RECOMMENDED OPTION:

- TSREH-Series: Heater vulcanized to an aluminum plate for easy installation.



RECOMMENDED SOLUTIONS FOR TEMPERATURE CONTROL




SNOW SWITCH® MODEL LCD-8

Configurable Aerial Snow Melting Controller

The Snow Switch Model LCD-8 is a configurable aerial snow melting controller designed to make automatic snow melting a cost-effective solution for small-to-medium applications, specifically tailored for hydronic and building automation systems. It ensures heaters operate only when necessary—at temperatures below the user-defined set point (38°F/3.3°C default)—and utilizes an adjustable “hold-on” timer (3-hour default) to ensure surfaces are completely clear and dry after snow has stopped.

FEATURES & BENEFITS

- Automatic snow and ice melting controller minimizes operating costs
- Configurable Settings: Easily adjust temperature set points and hold-on times to suit specific site requirements.
- Sno-Test™ Technology: Simplifies system verification by performing an automatic self-test upon power-up, eliminating the need for manual ice testing.
- Adjustable Hold-On timer continues heater operation after snow and ice stop to ensure complete melting
- Dual sensor capability to meet site performance requirements
- Automatic and manual-override operator controls for changing environmental conditions
- Optional remote control operation for added convenience



SNOW SWITCH® MODEL GF PRO

Automatic Snow and Ice Melting System Control

The Snow Switch Model GF Pro is an automatic control system designed for efficient snow and ice melting. Engineered for both commercial and residential applications, this controller is ideal for managing heating systems for pavement, sidewalks, loading docks, roofs, and gutters.

The GF Pro features built-in 30mA, self-testing Ground Fault Equipment Protection (GFEP) and supports dual sensors for optimized site performance. With both automatic and manual-override controls, it ensures complete surface clearing while minimizing operating costs.

FEATURES & BENEFITS

- Automatic snow and ice melting control minimizes operating costs
- Supply Voltage 100 - 277 VAC. Rated for up to 30 amp resistive loads
- Integral 30mA of Ground Fault Equipment Protection (GFEP)
- Weather-resistant NEMA 4X enclosure
- UL Listed for Temperature Regulating Equipment
- Adjustable Hold-On timer continues heater operation after snow and ice stop to ensure complete melting
- Dual sensor capability to meet site performance requirements
- Automatic and manual-override operator controls for changing environmental conditions
- Optional remote control operation for added convenience

NOTE: Snow and ice sensors are sold separately.

RECOMMENDED SOLUTIONS FOR SNOW & ICE SENSORS



SNOW SWITCH MODEL GIT-1 Automatic Gutter De-Icing Sensor

The GIT-1 Gutter Ice Sensor provides a reliable, automatic deicing solution for gutters and downspouts. Designed for use with APS-3C or APS-4C control panels, this sensor system ensures heaters operate only when moisture is detected at temperatures below 38°F (3.3°C), significantly reducing energy consumption.

By mounting directly in the gutter or downspout, the GIT-1 senses actual environmental conditions to ensure high accuracy. Its unique microcontroller design prevents ice bridging and tunneling, ensuring consistent and effective heater operation.

FEATURES & BENEFITS

- Reduces operating cost
- Reliable automatic deicing control
- Senses both moisture and temperature
- Low voltage operation
- Avoids ice Bridging
- Rugged Housing
- Simple low cost installation
- Field proven reliability



SNOW SWITCH® MODEL SIT-6E Pavement-Mounted Snow & Ice Sensor

The Snow Switch Model SIT-6E Pavement-Mounted Snow and Ice Sensor reliably detects snow and ice conditions on pavement surfaces when used with any Environmental Technology (ETI) APS, Pro Series, or EUR model control panel. The SIT-6E pavement sensor ensures that deicing heaters operate only while needed which minimizes energy costs without sacrificing snow melting effectiveness.

As part of a snow melting system, an SIT-6E sensor will signal for snow and ice melting at pavement temperatures below 38°F (3.3°C) while moisture in any form—including water, snow, sleet or ice—is present

FEATURES & BENEFITS

- Control based upon pavement conditions
- Rugged construction
- Simple installation
- Low voltage operation
- Reliable Snow Melting
- Minimum Energy Cost
- Long trouble-free life
- NEC Class 2 for wet locations

NOTE: The required pavement sensor housing (part number 23832) is sold separately.

ADDITIONAL RECOMMENDED SOLUTIONS FOR FREEZE PROTECTION



SPEEDTRACE SELF-REGULATING HEATING CABLE

SpeedTrace heating cables are ideal solutions for easy-to-install pipe freeze protection and safe thawing of metal and plastic pipe & valve assemblies. They may be used on metal and plastic pipes. No temperature control is required although BriskHeat does recommend pairing this with the THERMO-CUBE, a temperature controlled outlet adapter.

The perfect plug-and-play option that is easy to install with choice of pre-assembled plug. These cables are safe to overlap and insulate. Suitable for extreme cold conditions as low as -40°F (-40°C).

RECOMMENDED OPTIONS:

- FFSL-Series: 5 watts/ft (16 watts/m) at 50°F (10°C) self-regulating heating cable.
- FFSL8-Series: 8 watts/ft (26/watts/m) at 50°F (10°C) self-regulating heating cable.



CRANKCASE HEATERS

Designed to protect compressors in cold conditions, crankcase heaters prevent refrigerant migration and condensation into the lubricating oil. By maintaining optimal oil temperature, they ensure proper lubrication at startup, prevent costly damage, and extend the lifespan of HVACR and refrigeration equipment. This heater is moistureproof, corrosion-resistant, and grounded for safety.

RECOMMENDED OPTION:

- CCH-Series: Band-style crankcase heater, provides flexibility and ease of installation.



HOTBELT™ WRAPAROUND REFRIGERANT JUG WARMER

The BriskHeat HotBelt is a specialized wraparound warmer for refrigerant jugs and small gas cylinders. It enhances cold-weather performance by increasing the vaporization rate and maintaining optimal pressure, leading to faster, more efficient charging of HVACR systems.

RECOMMENDED OPTION:

- HB-Series: The HotBelt series comes with built-in preset thermostats for easy plug-and-play use and are grounded for safety. Safe for use with R-410A, R-407C, R134a, R-22, and more.

GENERAL CHECKLIST

Regularly checking your facility and systems for efficiency and safety before winter is always a good idea. Planning ahead is key to preventing freeze damage and ensuring safety. Below are general checklists to help improve your freeze protection.

Please note these are not all-inclusive, and BriskHeat recommend consulting a trained professional to review your corporate policies and local/national codes prior to implementing your plan.

GENERAL PREPARATION STEPS

		ASSIGNED TO	COMPLETE DATE	SIGN-OFF
SYSTEM & EQUIPMENT READINESS	Clean and functionally test all heating systems. Apply heat to susceptible areas.			
	Inspect, test, and stage portable auxiliary heaters.			
	Surface Heaters (tapes, cables, drum/tote heaters): Inspect condition, verify operation and temperature settings. Test ground-fault protection and replace as needed.			
	Tip: Check power cords for damaged insulation or loose connections to prevent sparks or injury.			
WATER & FLUID SYSTEMS	Main Water Supply: Identify and test main water supply shut-off valves for each facility. Ensure accessibility for emergency personnel. Apply heat to prone areas.			
	Wet-Pipe Sprinkler System: Inspect for areas prone to freezing and apply heat as needed.			
	Antifreeze Levels: Check and fill antifreeze in cooling systems as necessary.			
	Seasonal Cooling Systems: Drain and remove water unless protected by heating tapes or antifreeze.			
	Water & Air Lines: Inspect and identify all remaining water and air lines subject to freezing. Install appropriate heat and insulation. <i>Tip: Pay special attention to valves, as they are major choke points prone to damage.</i>			
WATER & FLUID SYSTEMS	Main Water Supply: Identify and test main water supply shut-off valves for each facility. Ensure accessibility for emergency personnel. Apply heat to prone areas.			
	Wet-Pipe Sprinkler System: Inspect for areas prone to freezing and apply heat as needed.			

GENERAL PREPARATION STEPS

		ASSIGNED TO	COMPLETE DATE	SIGN-OFF
HVAC & SPECIALIZED SYSTEMS	HVAC Controls: Protect HVAC power and temperature controls from inadvertent deactivation.			
	Cooling Towe Lines (Heat Trace): Inspect, test, and repair heat trace heating cable on cooling tower supply and return lines. Apply heat to susceptible areas.			
	Steam Systems: Perform blowdowns on drip legs, clean strainers, and test temperature sensing devices for control valve/damper actuation. Check steam traps, actuators, and controllers. Verify vacuum breakers are installed and working on all preheat/heating coils exposed to freezing.			
	Ventilation Systems: Test and calibrate all temperature sensing devices; check operation of valves, dampers, linkages, actuators, and controllers.			
EQUIPMENT	Freeze-Susceptible Materials (Storage): Identify materials prone to freeze damage in outdoor or unheated storage areas. Plan for easy heating/thawing to maintain production.			
	Control Panels & Electronics: Identify control panels and electronics devices susceptible to condensation. Install enclosure heaters to prevent short circuits and corrosion.			
SAFETY & PLANNING	Icy Conditions (Personal Safety): Identify slip-risk areas due to ice. Develop a slip prevention plan and apply heat to susceptible areas.			
	Emergency Preparedness: Have a plan to remove temporary de-icing heaters after cold season.			
	HVAC Problem Reporting: Institute a facility-wide awareness plan for reporting suspected HVAC issues during warm weather.			
HAZARDOUS MATERIALS	Ensure that all containers used for hazardous or toxic materials are properly stored, and inspect them for deterioration prior to handling. If containers become brittle (due to the combination of chemical attack, freezing temperatures, and ultraviolet light), they may break when moved.			
	Liquids should not be permitted to remain in unheated process lines during periods when production has been stopped. All lines should be drained and purged to prevent future line breakage due to freezing temperatures.			
	Ensure that piping, tanks, and valves in systems that carry hazardous or toxic substances are properly insulated.			

TESTING & INSPECTION LOG FOR HEATING CABLE

INSTRUCTIONS:

- 1. One Sheet Per Circuit: This inspection form allows for up to five inspections to be compared to an individual circuit.
- 2. Maintenance Check Frequency:
 - Freeze Protection Circuits: Prior to the first freeze
 - Temperature Maintenance Circuits: At least twice per year

Circuit Number

Heater Type

Circuit Length


PERIODIC INSPECTION RECORD FORM

		MM/YY	MM/YY	MM/YY	MM/YY
Visual inspection inside connection box for corrosion, moisture, etc.	Initial				
Damage or cracks (leaks) in insulation seals at valves, hangers, pumps, etc.	Initial				
Heating cable properly connected and grounded; heating cable and connections insulated from connection box.	Initial				
Thermostat checked for moisture, corrosion, setpoint, switch operation, and sensor damage.	Setpoint Initial				
Megger tests performed at power connection with both bus wires disconnected from power wiring.	Reading Initial				
Circuit voltage at power connection.	Reading				
Circuit amperage after 5 minutes.	Reading				
Pipe temperature at time amps were measured.	Reading				
Watts/ft	Watts/Ft. Initial				
All connections, boxes, and thermostats have been resealed.	Initial				
End seals, covered splices, and tees marked on insulation cladding.	Initial				

HEATING CABLE INSULATION RESISTANCE TEST

The insulation resistance test is used to check for damage to extruded jackets. Connections for the megger are made as shown in Figures 1 & 2.


A record should be kept of the readings taken from the time the cable is first installed on the pipe. A history of the insulation resistance reading can be helpful in spotting moisture ingress into the electrical system by seeing a gradual decline in the insulation resistance or physical damage to the heating cable (sharp decline in the insulation resistance). See the previous page for sample record.

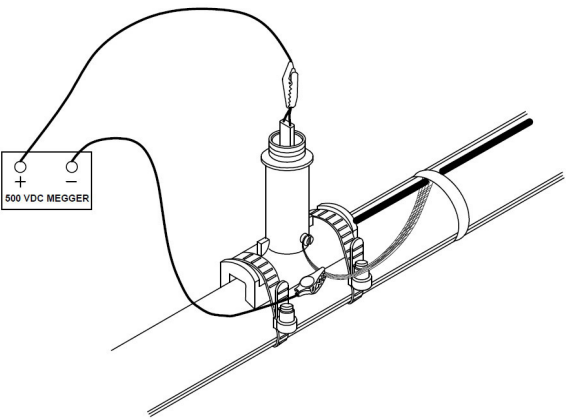

FOR HEATING CABLE WITH BRAID

Test from heating cable bus to braid.

Note: Test should use at least a 500 VDC megger. Do not use a megger with an excess of 2500 VDC. Minimum acceptable readings should be 20 megohms per circuit, regardless of length.

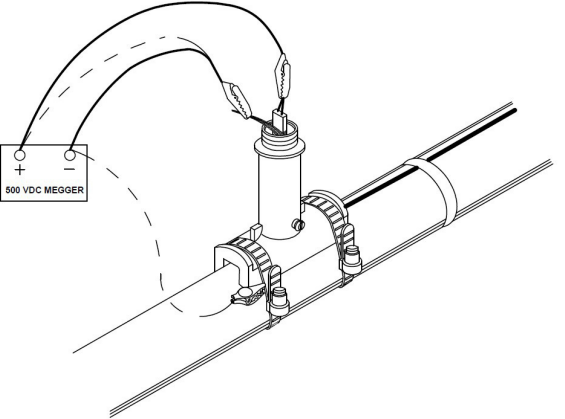

FOR HEATING CABLES WITH BRAID & OUTER JACKET

Test A - (solid lines) from heating cable bus wires to braid.

Test B - (dotted lines) from braid to metal pipe.

PIPE LINES & VALVES EXPOSED TO FREEZING CONDITIONS CHECKLIST

Use this checklist to identify the pipe lines and valves that need heat. Your local distributor or BriskHeat will help determine the proper type and amount of heat, insulation, and accessories necessary for your application.

PIPE/VALVE LOCATION WHERE HEAT IS NEEDED	LENGTH OF PIPE OR SIZE OF VALVES WHERE HEAT IS NEEDED	OUTSIDE DIAMETER OF OBJECT TO BE HEATED	TEMPERATURE REQUIRED	AVAILABLE VOLTAGE SUPPLY & CIRCUIT BREAKER SIZE	HAZARDOUS LOCATION? (Y/N) IF YES, CLASSIFICATION?	INSULATION IS NEEDED? (Y/N) INSULATION THICKNESS?

HEATING & FREEZE PROTECTION FOR LARGE TANKS, VESSELS, & HOPPERS CHECKLIST

Use this checklist to identify the tanks, vessels, and hoppers that are predisposed to freezing. Your local distributor or BriskHeat will help recommend exactly how much heat you need to prevent freezing or improve flow, and which style of heater, insulation, and temperature control is right for you.

VESSEL LOCATION (MAKE SPECIAL NOTE IF IT IS IN A HAZARDOUS AREA)	VESSEL TYPE (CYLINDRICAL TANK, RECTANGULAR TANK, HOPPER, ETC.)	VESSEL SIZE	VESSEL OUTER MATERIAL (METAL, PLASTIC, ETC.)	CONTENT STORED IN VESSEL	PROCESS TEMPERATURE	AVAILABLE VOLTAGE SUPPLY & CIRCUIT BREAKER SIZE

PROCUREMENT LISTS FOR FREEZE PROTECTION SOLUTIONS

The following tables allow you to track and note freeze protection solutions that are needed to ensure your operations remain in full force during harsh, cold weather.


HEAT TRACE

[illegible]

HEAT TRACE ACCESSORIES

Part No.	Watt/ft	120/240 VAC	JACKET
PTBS-GET	Power Connection Kit with Multiple Entries		
PET-CA-P	Connection Kit Frog Leg Expansion Piece		
PTBS-GET	Low Profile End Seal Kit		
PET-CA-P	Low Profile Splice Connection Kit		
PTBS-GET	Low Profile Tee Connection Kit		
PET-CA-P	LED Monitor Light with End Seal Kit (Green)		
PTBS-GET	LED Monitor Light with End Seal Kit (Red)		
PET-CA-P	Connection Kit and End Seal w/o Junction Box		
PTBS-GET	Ground Fault Power Connection Kit with Plug		
PET-CA-P	Heat Shrink End Seal Kit		
PTBS-GET	Ground Fault Power Connection Kit with Plug		
PET-CA-P	Heat Shrink End Seal Kit		

EXAMPLE OF HEATING CABLE INSTALLATION

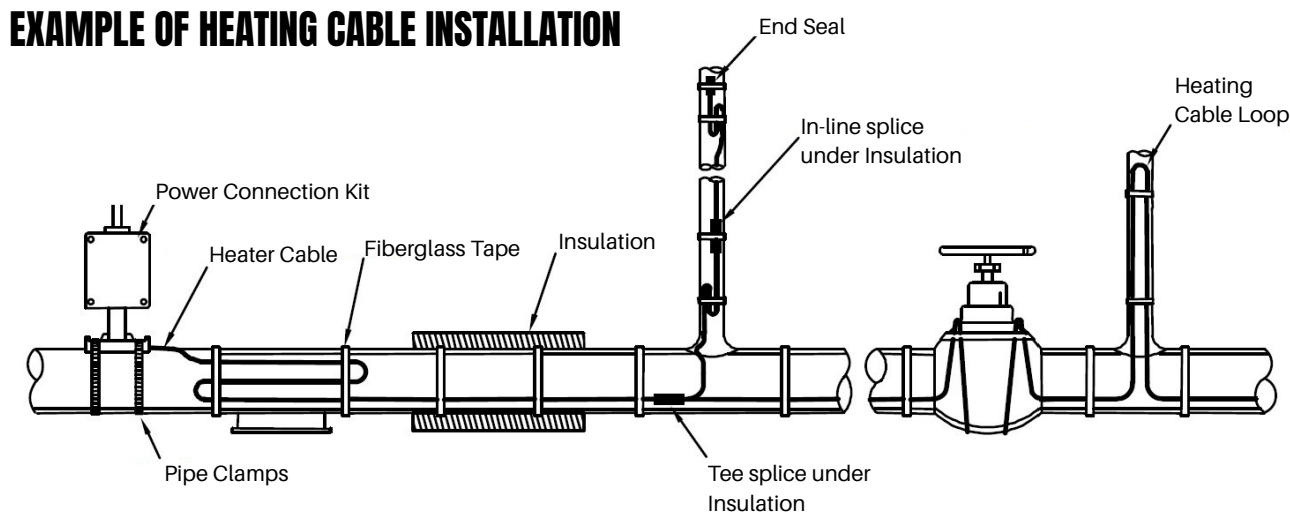

PROCUREMENT LISTS FOR FREEZE PROTECTION SOLUTIONS

DRUMS/PAILS

Qty. of Containers that Need Heat	Container Size (Make special note if the container will be in Hazardous Area)	Container Outer Material (Metal, Plastic, etc.)	Available Voltage Supply for Heater (120V or 240V)
	55-Gallon (208 litre) drum/barrels		
	30-Gallon (114 litre) drum/barrels		
	15 & 16-Gallon (57 &60 litre) pails		
	5-Gallon (19 litre) pails		

TIP: FOR FASTER HEAT-UP, USE MULTIPLE SILICONE RUBBER BAND HEATERS AT ONE TIME OR A FULL-COVERAGE INSULATED DRUM HEATER.

IBC/TOTE TANKS

Qty. of Tanks that Need Heat	Tank Height (Not including pallet or support stand)	Tank Length	Tank Width	Tank Outer Material (plastic, metal, etc.)	Available Voltage Supply for Heaters (120V or 240V)

GAS CYLINDERS


Qty. of Cylinders that Need Heat	Cylinder Diameter	Cylinder Height	Hazardous Location? (Y/N) If Yes, Classification?	Available Voltage Supply for Heater (120V or 240V)

EMERGENCY DE-ICING/BACKUP HEATERS

QTY.	Product Description	Part Number (120V)	Part Number (240V)
	MSTAT XtremeFLEX® Heating Tape with Adjustable Thermostat Controls up to 160°F (71°C)		
	MSTAT XtremeFLEX® Heating Tape with Adjustable Thermostat Controls up to 160°F (71°C)		
	HSTAT XtremeFLEX® Heating Tape with Adjustable Thermostat Controls up to 425°F (218°C)		
	HSTAT XtremeFLEX® Heating Tape with Adjustable Thermostat Controls up to 425°F (218°C)		
	TSREH Enclosure Heaters		
	TSREH Enclosure Heaters		

ADDITIONAL SOLUTIONS

Qty	Product Description	Part Number
	Band-Style Crankcase Heaters for HVAC/R Compressor	
	Band-Style Crankcase Heaters for HVAC/R Compressor	
	HotBelt™ Wraparound Refrigerant Warmer	
	HotBelt™ Wraparound Refrigerant Warmer	
	Snow Switch® Model LCD-8	
	Snow Switch® Model GF Pro	
	Snow Switch® Model GIT-1	
	Snow Switch® Model SIT-6E	

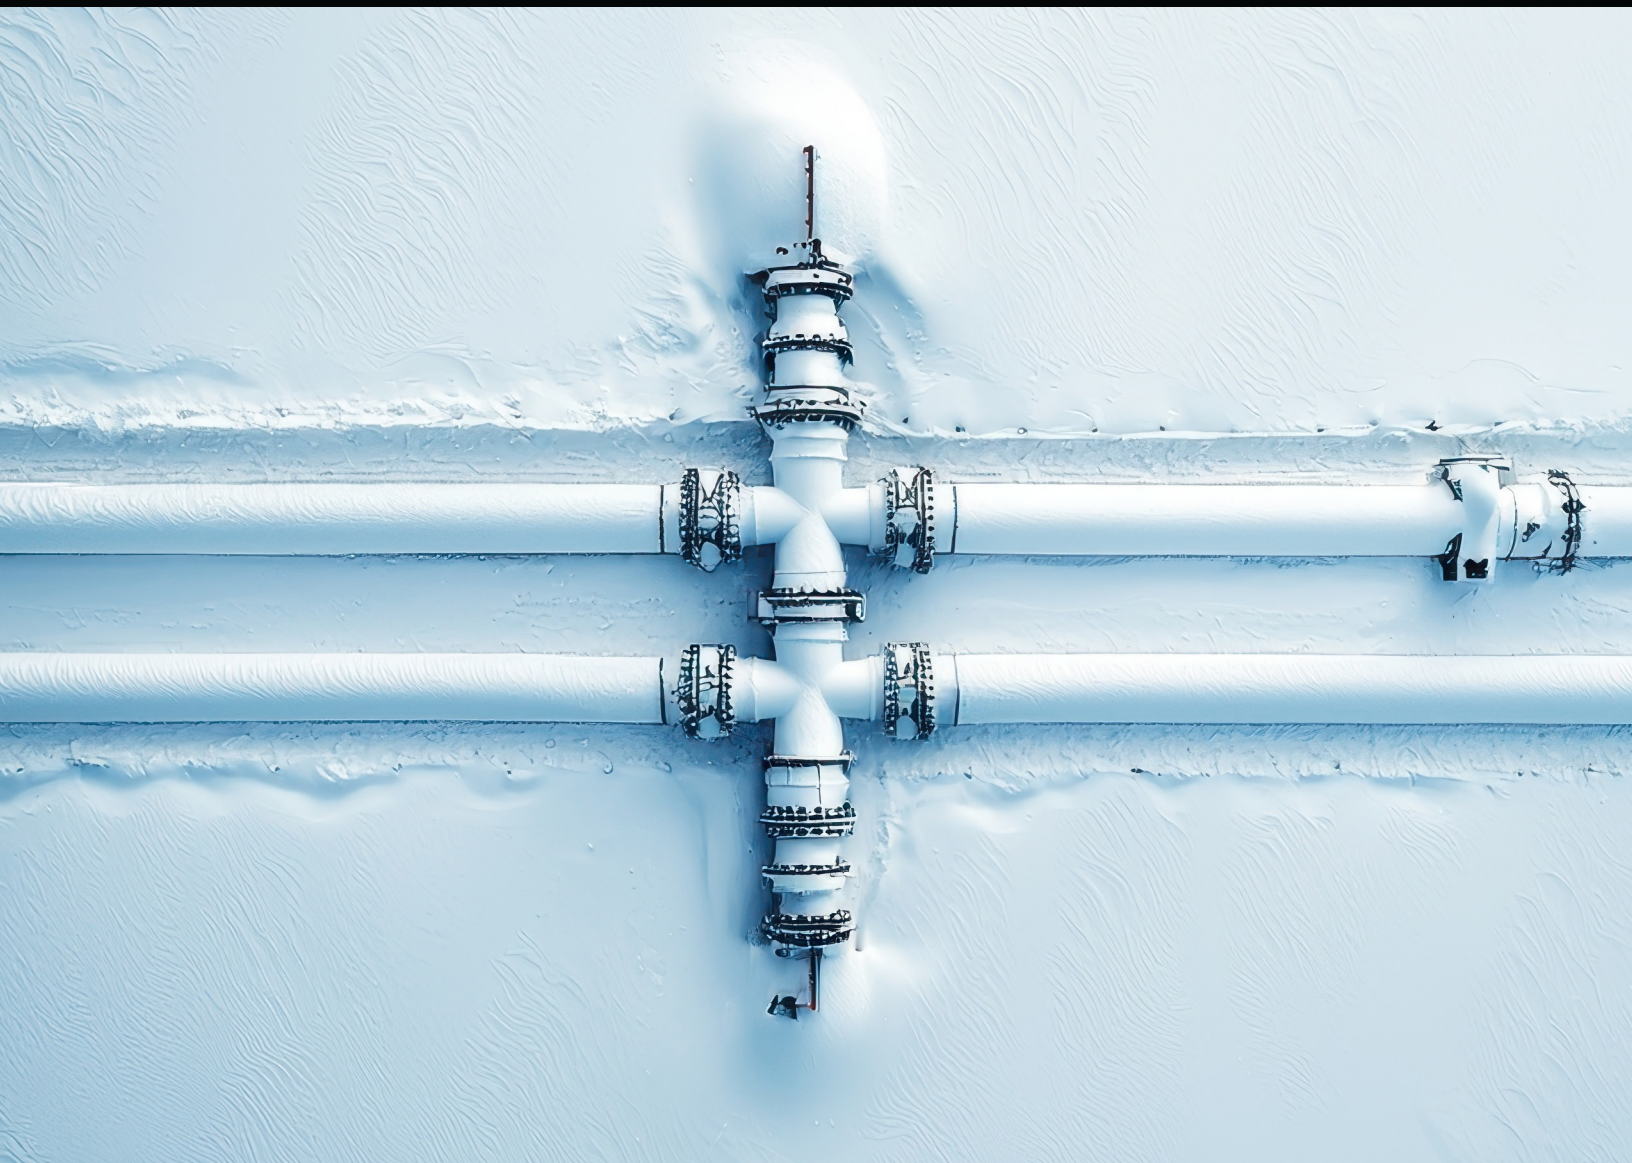

WE CAN HELP YOU ANY TIME, ANY WHERE

BriskHeat Account Executives are a resource for corporate partners, local distributors, manufacturers' representatives, and end users. With distributors and reps located throughout North and South America, Asia, Europe, and Australia, local support is available to provide the right solution to your heating needs.



**SCAN THE QR CODE
TO FIND A DISTRIBUTOR
OR REP NEAR YOU!**

4800 Hilton Corporate Drive
Columbus, OH 43232
info@briskheat.com

PN: FPCATALOG2025

BriskHeat®

For more info, visit briskheat.com