


Vacuum Bagging Materials

Vacuum Bagging Film:

- Nylon vacuum bagging film: Ideal for composite curing applications
- Cut-to-order
- 54" (1372mm) wide per linear foot
- 0.002" (0.05mm) thick
- Tensile strength: 7000psi
- Maximum recommended use temperature: 350°F (177°C)
- Melt point: 400°F (204°C)
- Density: 1.13g/cm³
- Color: Clear


Part Number: ACR-BAG-001

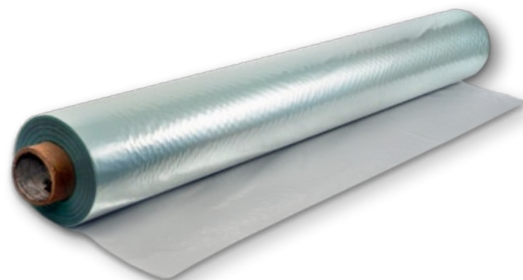

High-Performance Release Film:

- Fluoropolymer release film
- Cut-to-order
- 48" (1219mm) wide per linear foot
- 0.001" (0.025mm) thick
- Elongation at break: 350%
- Tensile strength: 7000psi
- Maximum recommended use temperature: 500°F (260°C)
- Base polymer: E-TFE
- Density: 1.73g/cm³
- Color: Blue

Part Number: ACR-FLM-001

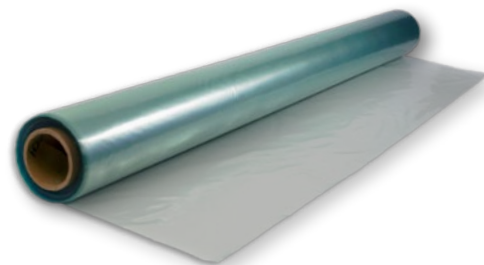

Breather Cloth:

- Non-woven polyester breather / bleeder cloth
- Cut-to-order
- 60" (1524mm) wide per linear yard
- Maximum recommended use temperature: 400°F (204°C)
- Nominal weight: 4oz/yd²
- Color: White

Part Number: ACR-BCT-001



Vacuum Bag Sealant Tape:

- Roll size: 0.5" wide x 25ft long (13mm wide x 7.6m long)
- Thickness: 1/8" (3.2mm)
- Maximum recommended use temperature: 400°F (204°C)
- Base material: Synthetic rubber
- Color: Yellow

Part Number: ACR-SLT-001

