

CLOTH HEATING JACKETS

Specifications

Voltage Options: 120–600 VAC, Single or 3-Phase (Wye or Delta), VDC, 50 or 60 Hz

Built-in Control/High-Limit Thermostat Options*: 180°F (82°C), 248°F (120°C), 302°F (150°C), 347°F (175°C), 392°F (200°C), 500°F (260°C)

Low-Limit Thermostat Options*: 180°F (82°C) with 30°F (-1°C) differential, 248°F (120°C) with 50°F (10°C) differential

*Other options available



Power Plug/Connector Options*: Mate-n-lock, twist lock, CPC connector, bare wire

Temperature Sensor Options: Platinum PT100 RTD, Type-J Thermocouple, Type-K Thermocouple, Thermistor

Other Available Options: High-limit manual reset, temperature sensor plug or receptacle, temperature indicator lights, built-in digital temperature controller, built-in LYNX®



Gray PTFE Vacuum Bake-Out Heater Chamber

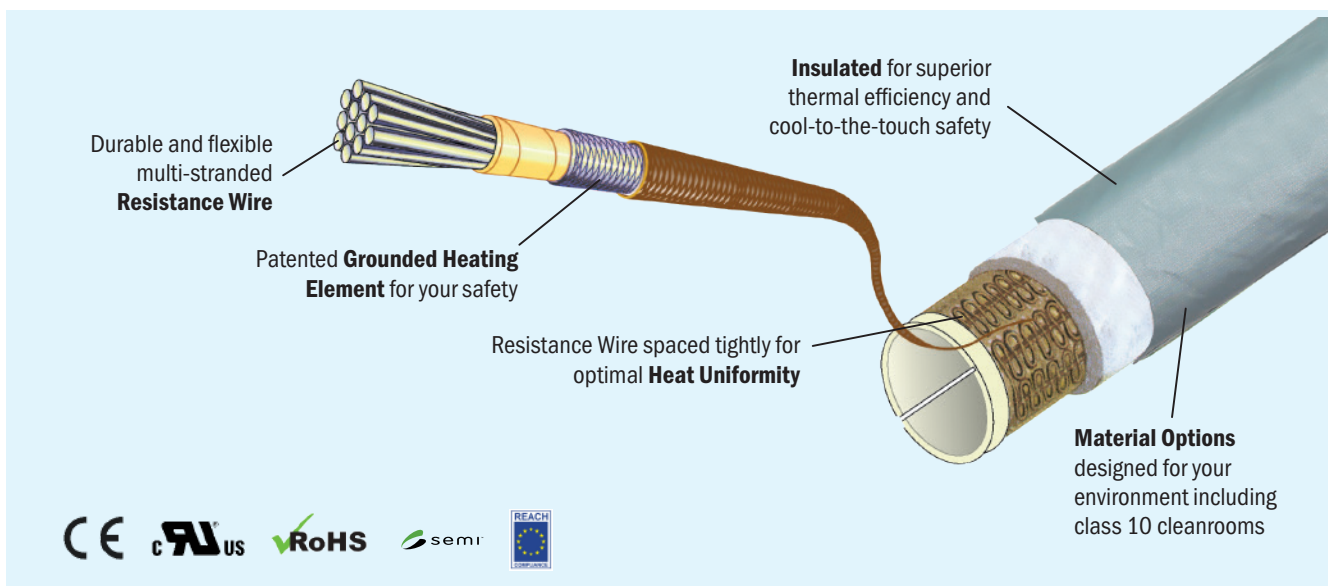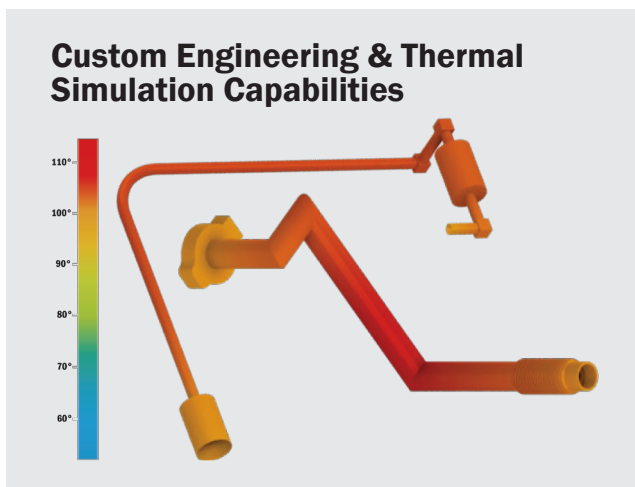

Custom Sizes and Designs Available: Contact BriskHeat® or your local distributor for more information.

800-848-7673 | 614-294-3376 | BriskHeat.com | bhtsales1@briskheat.com