

## CRANKCASE HEATERS FOR HVAC/R COMPRESSORS

### Features & Benefits

- ▶ Band-style is flexible and easy to install
- ▶ Rapid heat-up
- ▶ Moisture proof
- ▶ Corrosion resistant
- ▶ Grounded for safety
- ▶ OEM replacement

**NEW!**



### Specifications

**Material:** Aluminum band with SS closure strap

**Band Width:** 0.5 in (12.7 mm)


**Band Thickness:** 0.25 in (6.4 mm)

**Max Surface Temperature:** 302°F (150°C)

**Lead Wires:** 18 ga XLPE insulated leads with bare wire (no plug)

**Ground Wire:** 18 ga green/yellow insulated ground wire with ring terminal

**Clamp Style:** Quick-release band clamp with 5/16 in hex slotted screw

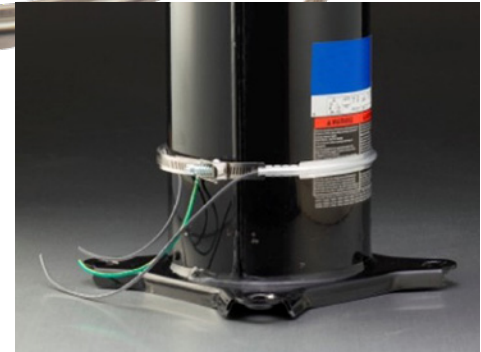

### Ordering Information

Step 1 – Measure the circumference or diameter of your crankcase or compressor

Step 2 – Determine voltage and wattage

Step 3 – Select heater based on those parameters

BriskHeat Part No.	Circumference in (cm)	Diameter in (cm)	Voltage	Wattage	Lead Length in (cm)	Ground Length in (cm)
840051001	15.3 to 22 (38.9 to 55.9)	4.9 to 7 (12.4 to 17.8)	240	40	21.25 (54)	21.25 (54)
840051002	20.5 to 27.1 (52.1 to 68.8)	6.5 to 8.7 (16.5 to 22.1)	240	40	21.75 (55.2)	29.25 (74.3)
840051004	21.3 to 28 (54.1 to 71.1)	6.8 to 8.9 (17.3 to 22.6)	480	70	21.75 (55.2)	29.25 (74.3)
840051006	21.3 to 28 (54.1 to 71.1)	6.8 to 8.9 (17.3 to 22.6)	240	70	48.25 (122.6)	48.25 (122.6)
840051007	27.3 to 34 (69.3 to 86.4)	8.7 to 10.8 (22.1 to 27.4)	240	93	48.25 (122.6)	48.25 (122.6)
840051008	27.3 to 34 (69.3 to 86.4)	8.7 to 10.8 (22.1 to 27.4)	480/400	93/66	48.25 (122.6)	48.25 (122.6)
840051009	39.5 to 46.1 (100.3 to 117.1)	12.6 to 14.7 (32 to 37.3)	230	95	28.75 (73)	29.25 (74.3)
840051010	27.3 to 34 (69.3 to 86.4)	8.7 to 10.8 (22.1 to 27.4)	230	66	48.25 (122.6)	48.25 (122.6)