

SILVER-SERIES 2 INSULATORS

NEW!

Features & Benefits

Silver-Series 2 Removable Cloth Insulators are a configurable system of removable insulator blankets and covers that feature durable high-temperature cloth, energy-efficient fiberglass insulation, and hook & loop closures for easy installation and removal. This cost-effective solution improves thermal efficiency for hot and cold pipes, tanks, and vessels in industrial and commercial environments. Custom designs can be manufactured for unique requirements.

- ▶ Removable and reusable design provides an economical solution
- ▶ Easy-to-install configurable system with cut-to-length straights
- ▶ Durable product design delivers long service life
- ▶ Moisture & chemical resistant
- ▶ High-temperature resistance
- ▶ Fire-retardant, asbestos-free material

Specifications

Maximum Exposure Temperature: Up to 500°F (260°C)

Facing & Liner Material: PTFE cloth

Insulation: 1 in (25 mm) thick fiberglass


Thermal Performance: R3.3, K0.21@75°F (24°C)

IP Rating: IP54



**Moisture
& Chemical
Resistant**

Quality Construction

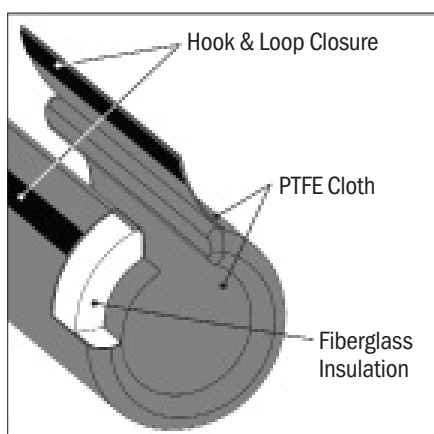

Cut-to-Length Versatility



Straight pipe insulators can be cut-in-the-field


SILVER-SERIES 2 INSULATORS

Ordering Information

Straight Sections (Cut-to-Length)



A ID of Insulator in (mm)	B Length in (mm)	Part No.
1.82 (46)	90 (2286)	SSIP10CTL-2V
2.40 (61)	90 (2286)	SSIP15CTL-2V
2.88 (73)	90 (2286)	SSIP20CTL-2V
4.00 (102)	90 (2286)	SSIP30CTL-2V
5.00 (127)	90 (2286)	SSIP40CTL-2V




Total usable length for each straight insulator is 90 in (2286 mm) – can be cut-to-length in the field in 6 in (152 mm) and 12 in (305 mm) increments. Cut area 0.75 in (19 mm) wide.




90° Elbows

A ID of Insulator in (mm)	B Height in (mm)	Part No.
2.27 (58)	5 (127)	SSI9010-2V
2.93 (74)	6 (152)	SSI9015-2V
3.46 (88)	7 (178)	SSI9020-2V
4.78 (121)	8.5 (216)	SSI9030-2V
5.90 (150)	11 (279)	SSI9040-2V




Straight Sections (Precut Lengths)



Straight sections in ready-to-use lengths of 6, 12, 24, 36, and 48 in (152, 305, 610, 914, and 1219 mm)

A ID of Insulator in (mm)	B Length in (mm)	Part No.
1.82 (46)	6 (152)	SSIP1006-2V
	12 (305)	SSIP1012-2V
	24 (610)	SSIP1024-2V
	36 (914)	SSIP1036-2V
	48 (1219)	SSIP1048-2V
2.40 (61)	6 (152)	SSIP1506-2V
	12 (305)	SSIP1512-2V
	24 (610)	SSIP1524-2V
	36 (914)	SSIP1536-2V
	48 (1219)	SSIP1548-2V
2.88 (73)	6 (152)	SSIP2006-2V
	12 (305)	SSIP2012-2V
	24 (610)	SSIP2024-2V
	36 (914)	SSIP2036-2V
	48 (1219)	SSIP2048-2V
4.00 (102)	6 (152)	SSIP3006-2V
	12 (305)	SSIP3012-2V
	24 (610)	SSIP3024-2V
	36 (914)	SSIP3036-2V
	48 (1219)	SSIP3048-2V
5.00 (127)	6 (152)	SSIP4006-2V
	12 (305)	SSIP4012-2V
	24 (610)	SSIP4024-2V
	36 (914)	SSIP4036-2V
	48 (1219)	SSIP4048-2V



EASY WAYS TO ORDER

1. Contact your local distributor. Check BriskHeat.com to locate a local distributor.
2. Call BriskHeat® at 800-848-7673 or 614-294-3376. We have a staff of application specialists to solve your unique needs.
3. Order online at BriskHeat.com - 24/7.

PAYMENT TERMS

Credit Card Options



Net 30 Option

Net 30 Terms are available to qualified companies. Please contact your Account Manager for additional details.


SILVER-SERIES 2 INSULATORS

Ordering Information


Flanges



A ID of Insulator in (mm)	B Length in (mm)	Part No.
4.75 (121)	8.00 (203)	SSIF10-2V
5.50 (140)	8.00 (203)	SSIF15-2V
6.50 (165)	8.00 (203)	SSIF20-2V
7.50 (191)	8.00 (203)	SSIF25-2V
8.00 (203)	8.00 (203)	SSIF30-2V
9.50 (241)	8.00 (203)	SSIF40-2V



Tees




A ID of Insulator in (mm)	B ID of Insulator in (mm)	C Length in (mm)	D Height- Center-line to top in (mm)	Part No.
2.25 (57)	2.25 (57)	8.00 (203)	5.00 (127)	SSIT10-2V
2.75 (70)	2.75 (70)	9.00 (229)	5.70 (145)	SSIT15-2V
3.25 (83)	3.25 (83)	9.75 (248)	6.10 (155)	SSIT20-2V
3.50 (89)	3.50 (89)	11.00 (279)	6.80 (173)	SSIT25-2V
4.75 (121)	4.75 (121)	12.00 (305)	7.30 (185)	SSIT30-2V
5.38 (137)	5.38 (137)	14.50 (368)	8.30 (211)	SSIT40-2V

2-Way Ball Valve




A ID of Insulator in (mm)	B Opening ID in (mm)	C Length in (mm)	Part No.
4.75 (121)	3.25 (83)	8.00 (203)	SSIVB102-2V
5.50 (140)	3.38 (86)	11.00 (279)	SSIVB152-2V
6.50 (165)	3.50 (89)	11.50 (292)	SSIVB202-2V
7.50 (191)	4.50 (114)	12.50 (318)	SSIVB252-2V
8.00 (203)	4.50 (114)	13.00 (330)	SSIVB302-2V
9.50 (241)	4.75 (121)	14.00 (356)	SSIVB402-2V



Seam Covers



A ID of Insulator in (mm)	B Length in (mm)	Part No.
3.88 (99)	3.50 (89)	SSIC10V-2V
4.46 (113)	3.50 (89)	SSIC15V-2V
4.94 (125)	3.50 (89)	SSIC20V-2V
6.06 (154)	3.50 (89)	SSIC30V-2V
7.06 (179)	3.50 (89)	SSIC40V-2V



*Seam covers are uninsulated sleeves which should be used over 2 adjoining straight sections to reduce heat loss.

“ I was very impressed with the closed-cell insulation. Great quality and easy to install over my heated cables. Just in time as well – we will get in the 20's this week. ”

~ Tony