


SCREW PLUG HEATER SELECTION GUIDE


Application	Solution or Application	Alkaline or Acid Content (Est. % by Volume)	Sheath Material	Typical Watt Density (watts/sq. in.)	Screw Plug Material
Water and Very Mild Solutions	Clean Water Neutral	pH6-8	Copper	45	Brass
	Process Water or Very Mild Solutions	pH5-9, 2-3%	Incoloy	45	Stainless Steel
	Mild Solutions	5-6%	Incoloy	45	Stainless Steel
	Demineralized or Deionized Water	-	Incoloy	45	Stainless Steel
Oil Heating	Low Viscosity Oil	-	Steel	23	Steel
	Medium Viscosity Oil	-	Steel	15	Steel
	High Viscosity Oil	-	Steel	6	Steel
Specialty Heaters	Process Water	pH5-9	Incoloy	45	Brass
	Demineralized Water	-	Incoloy	45	Stainless Steel
	Low Viscosity Oil	-	Incoloy	23	Steel
	Pipe Insert	-	Incoloy	12	Brass
	Hot Tubs, Spa	Treated	Incoloy	100	Brass
	Commercial Equipment	Clean Water	Incoloy	30	Brass
	Commercial Equipment	Clean Water	Copper	60	Brass

Installation

The heater is screwed into a pipe coupling or half coupling in a tank. Units must be immersed at all times for proper operation.

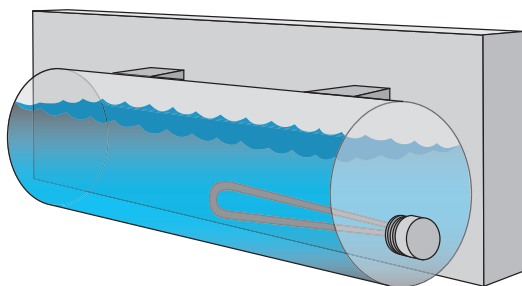

Oil Reservoir Heater

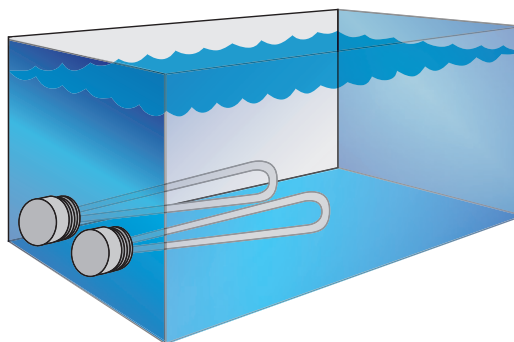

Tank Heater

EASY WAYS TO ORDER

1. Contact your local distributor. Check BriskHeat.com to locate a local distributor.
2. Call BriskHeat® at 800-848-7673 or 614-294-3376. We have a staff of application specialists to solve your unique needs.
3. Order online at BriskHeat.com - 24/7.

PAYMENT TERMS

Credit Card Options



Net 30 Option

Net 30 Terms are available to qualified companies. Please contact your Account Manager for additional details.