

WET-AREA FULL-COVERAGE DRUM/PAIL HEATERS & INSULATORS

Features & Benefits

- ▶ Extra-durable, water resistant design for indoor/outdoor use and in wash-down environments — IP54
- ▶ Insulated, full-coverage design
- ▶ Heater has easy-to-program digital controller: Adjustable up to 140° F (60° C)
- ▶ Lightweight and easy to install with adjustable buckles
- ▶ Suitable for both metal and plastic drums/pails
- ▶ Ideal for a wide range of environments including outdoor and wash-down locations
- ▶ Even heat distribution and maximum energy efficiency
- ▶ Easy-to-use — simple plug-and-play design
- ▶ Reusable and rugged — long service life
- ▶ Safe — heater has unique 360° grounded heating element and cool-touch surface for your safety

NEW!



Insulator — Pairs nicely with BriskHeat® silicone rubber drum heaters



Moisture & Chemical Resistant



Plug & Play



Heater — All-in-one, plug-and-play solution



Easy-to-program digital controller



Adjustable nylon straps with buckles

WET-AREA FULL-COVERAGE DRUM/PAIL HEATERS & INSULATORS

Specifications

- Outer Material:** Extra-durable polyester cloth
- Insulation:** 0.5 in (13 mm) thick closed-cell melamine
- Closure Method:** Adjustable straps with buckles
- Maximum Exposure Temperature:** 180°F (82°C)
- IP Rating:** IP54

Heater Specifications

- Operating Temperature:** Up to 140°F (60°C)
- Digital Control:** Programmable in °F and °C
- Built-in High-Limit Safety Thermostat:** 185°F (85°C)
- Heating Element:** 360° grounded heating element for your safety
- Dielectric Strength:** Over 2000 volts
- Power Cord:** 6 ft (1.8 m) long
 - 120 VAC: 3-prong grounded plug (NEMA 5-15P)
 - 240 VAC: 3-prong grounded plug (NEMA 6-15P)



Certified to UL safety standards
Approval is for heater

Ordering Information

Heaters


Part No. 120 VAC	Part No. 240 VAC	Size gal (l)	Minimum Diameter in (mm)	Maximum Diameter in (mm)	Height in (mm)	Total Watts	Weight lbs (kg)
FGPDHWC5120DV	FGPDHWC5240DV	5 (19)	10.8 (274)	12.4 (315)	13.5 (343)	165	6 (2.4)
FGPDHWC15120DV	FGPDHWC15240DV	15 to 16 (57 to 61)	14.3 (363)	15.9 (404)	26.7 (678)	210	8 (3.3)
FGPDHWC30120DV	FGPDHWC30240DV	30 (114)	18.8 (478)	20.3 (516)	29.5 (749)	300	10 (4.2)
FGPDHWC55120DV	FGPDHWC55240DV	55 (208)	22.2 (564)	24.2 (615)	36.4 (924)	600	13 (5.6)

Insulators

Part No.	Size gal (l)	Minimum Diameter in (mm)	Maximum Diameter in (mm)	Height in (mm)	Weight lbs (kg)
FGDIW5V	5 (19)	9.8 (249)	11.7 (297)	13.5 (343)	3 (1.4)
FGDIW15V	15 to 16 (57 to 61)	12.7 (323)	14.6 (371)	26.7 (678)	5 (2.3)
FGDIW30V	30 (114)	17.5 (444)	19.4 (493)	29.5 (749)	7 (3.2)
FGDIW55V	55 (200-208)	21.1 (536)	22.9 (582)	36.4 (924)	10 (4.5)



55-gallon (208 liters)
insulator cover

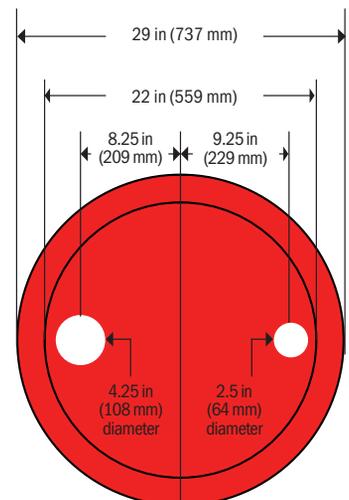

Heater
(FGDHW series)



Insulator
(FGDIW series)

Heated Area:

- 55 and 30-gallon size (208 and 114 liter): Lower two thirds
- 15 and 5-gallon size (61 and 19 liter): Lower third