

XtremeFLEX® RKP Heating Tapes with Preset Thermostat

- ▶ Extremely Flexible 1/4 in (6 mm) minimum bend radius
- ▶ Plug-and-play
- ▶ Moisture and chemical resistant
- ▶ Built-in preset thermostat
- ▶ Lengths up to 200 ft (61 m)

NEW!



XTREMEFLEX® RKP HEATING TAPES WITH PRESET THERMOSTAT

Specifications

Built-in Controlling Thermostat: 70°F or 122°F (21°C or 50°C)

Maximum Exposure Temperature: 450°F (232°C)

Outer Sheath: Silicone rubber extruded

Inner Construction: Fiberglass knitted and braided construction

Minimum Bend Radius: 0.25 in (6 mm)

Nominal Thickness: 0.125 in (3 mm)

Power Density: 1.0 W/in² (0.2 W/cm²)

Power Cord: 5 ft (1.5 m) long with

- 120 VAC: Standard 2-prong plug (NEMA 1-15)
- 240 VAC: Crimped ferrule leads

IP Rating: IP66

CE Models with crimped ferrule leads


RoHS



Plug & Play



Moisture & Chemical Resistant

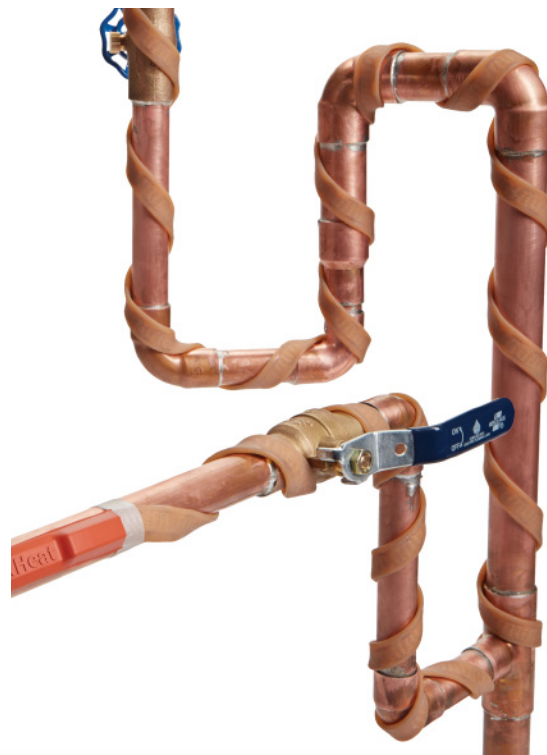

Ordering Information

Thermostat Setting 70°F (21°C)		Thermostat Setting 122°F (50°C)		Width in (mm)	Length ft (m)	Watts
Part No. 120 VAC	Part No. 240 VAC	Part No. 120 VAC	Part No. 240 VAC			
RKP1A0072	RKP2A0072	RKP1B0072	RKP2B0072	0.5 (13)	6 (1.8)	50
RKP1A0096	RKP2A0096	RKP1B0096	RKP2B0096		8 (2.4)	55
RKP1A0120	RKP2A0120	RKP1B0120	RKP2B0120		10 (3.0)	60
RKP1A0240	RKP2A0240	RKP1B0240	RKP2B0240	0.5 (13)	20 (6.1)	120
RKP1A0480	RKP2A0480	RKP1B0480	RKP2B0480		40 (12.2)	240
RKP1A0600	RKP2A0600	RKP1B0600	RKP2B0600		50 (15.2)	300
RKP1A0720	RKP2A0720	RKP1B0720	RKP2B0720		60 (18.3)	360
RKP1A0900	RKP2A0900	RKP1B0900	RKP2B0900		75 (22.9)	450
RKP1A0960	RKP2A0960	RKP1B0960	RKP2B0960		80 (24.4)	480
RKP1A1200	RKP2A1200	RKP1B1200	RKP2B1200	0.5 (13)	100 (30.5)	600
RKP1A1500	RKP2A1500	RKP1B1500	RKP2B1500		125 (38.1)	750
N/A	RKP2A1800	N/A	RKP2B1800		150 (45.7)	900
N/A	RKP2A2400	N/A	RKP2B2400		200 (61.0)	1200

Accessories

Part No.	Description
PSAT36A	Standard Fiberglass Tape Suitable for general purpose applications Size: 0.5 in x 108 ft (13 mm x 38 m) Silicone Adhesive Temp Limit: 392°F (200°C)
AAT2180	High Temperature Aluminum Tape 392°F (200°C) Size: 2 in x 180 ft (51 mm x 55 m) Silicone Adhesive w/ Liner Temp Limit: 500°F (260°C)



Custom Sizes and Designs Available:
Contact BriskHeat® or your local distributor or for more information.

BriskHeat®

800-848-7673 | 614-294-3376 | BriskHeat.com | bhtsales1@briskheat.com